

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance 8 ohms
- Max Amp Power 150 watts
- Frequency Response 80Hz - 20kHz
- Sensitivity 91 dB (1 watt @ 1 meter)
- Crossover Frequency 2500 Hz

SYSTEM COMPONENTS:

- Enclosure CC-3 (Not for Sale)
- Grille 332456-001
- Low/Mid Frequency Transducer (2) 5¼" (125mm) Co-Injected, Shielded (332147-001)
DC Resistance 7.4 ohms ±10%
- High Frequency Transducer 1" (25mm) Neodymium Soft Dome (333232-001)
DC Resistance 4.0 ohms ±10%
- Crossover Network 332156-001

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 4.0V Input 80 Hz to 20 kHz
- L.F. Aural Sweep Test 3.0V Input 80 Hz to 3 kHz
- H.F. Aural Sweep Test 2.0V Input 2 kHz to 20 kHz


PHYSICAL SPECIFICATIONS:

- Enclosure dimensions: 6½ x 18½ x 7¾" (H x W x D)
165 x 470 x 197 mm
- Weight 16 lbs. (7.3 kg) Each


WARRANTY:

- Refer to Warranty Statement packed with each product.


PACKAGING

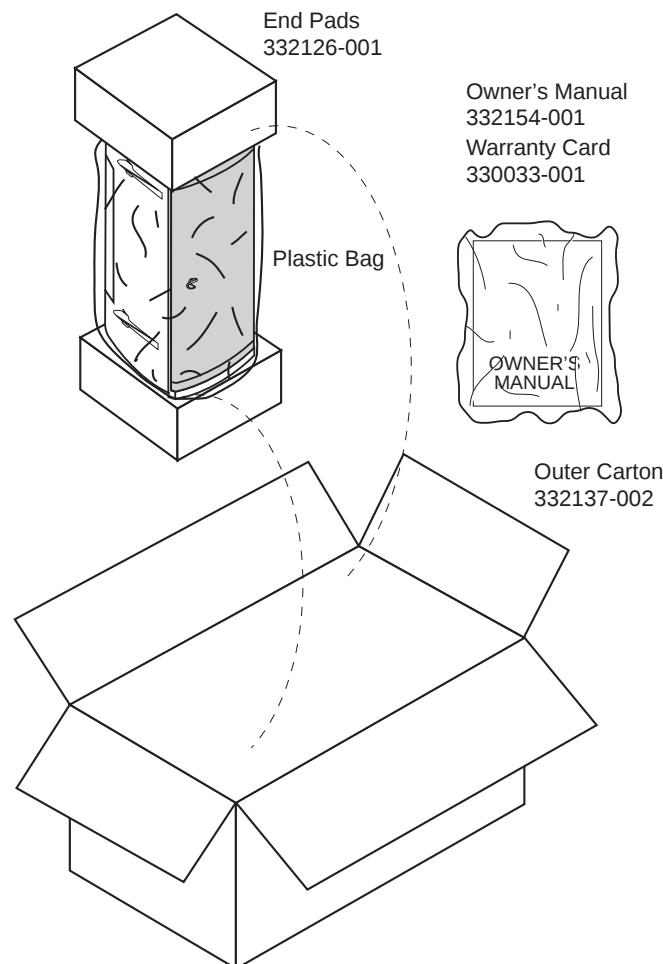

WIRING DIAGRAM

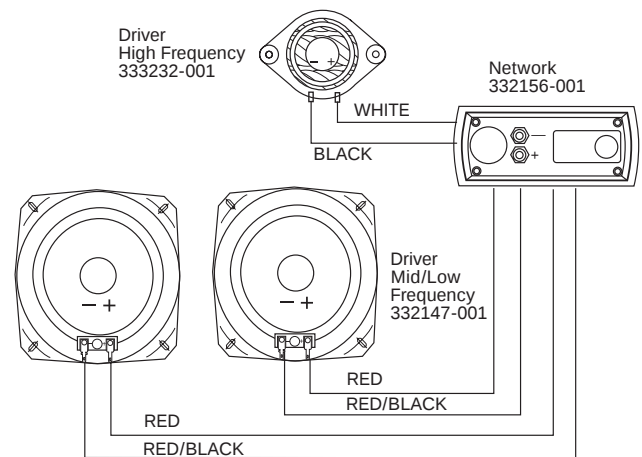


CC-3 SCHEMATIC

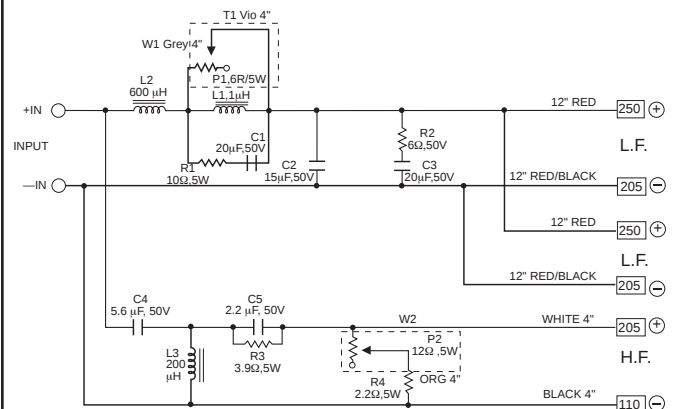

CC-3



EXPLODED VIEW

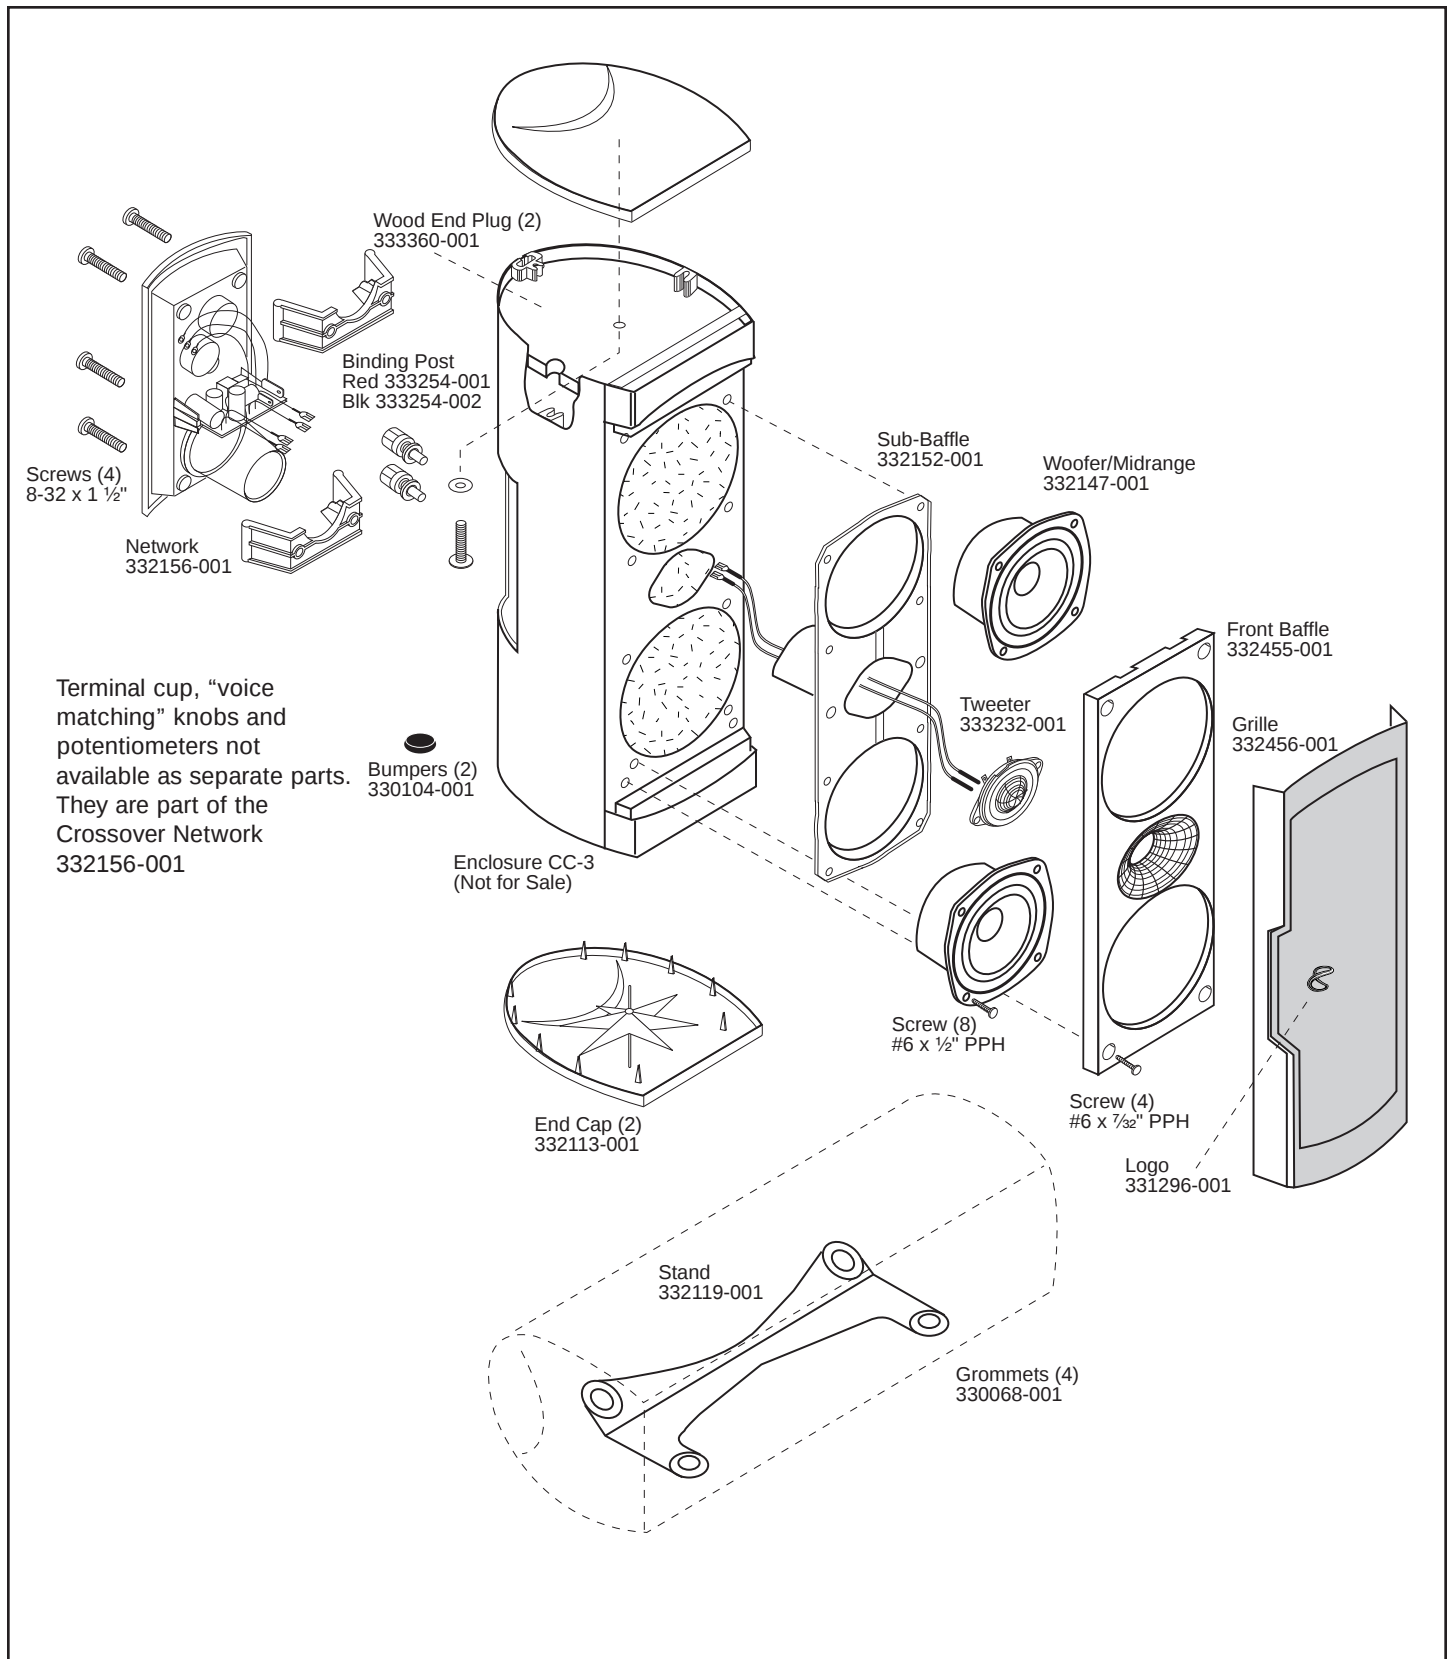

CC-3