

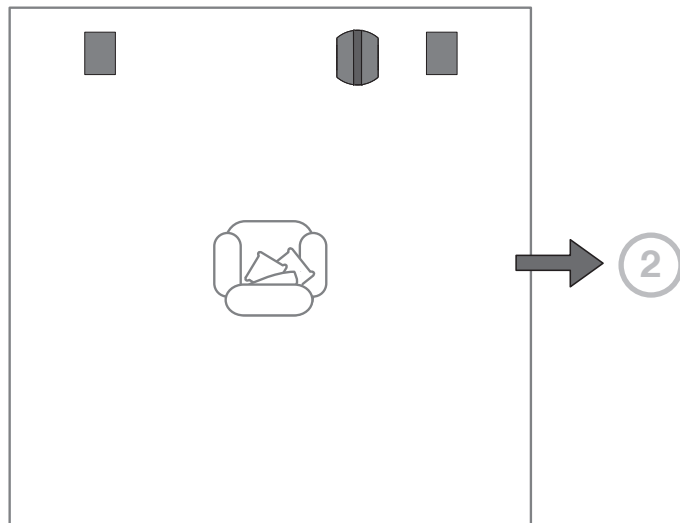



PV1D

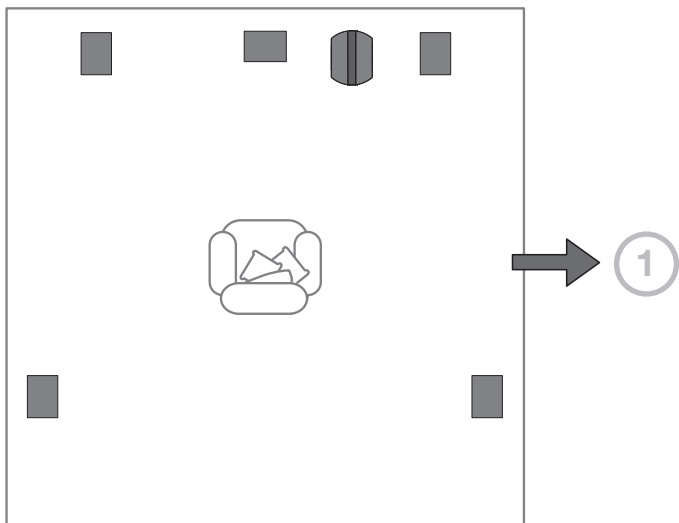



1 1a

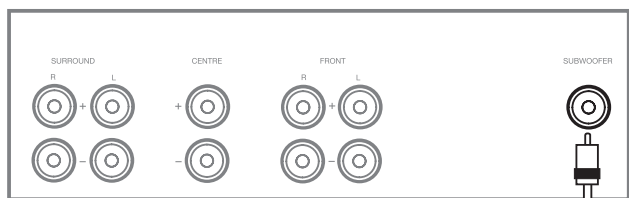


Processor

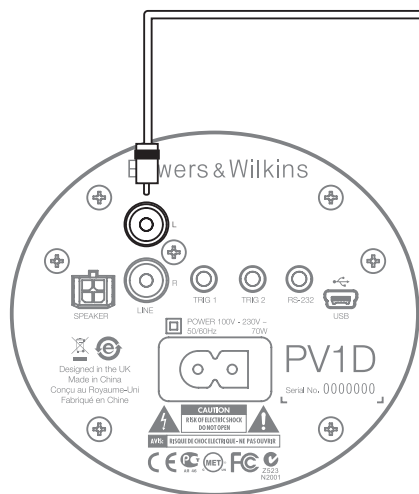


1b

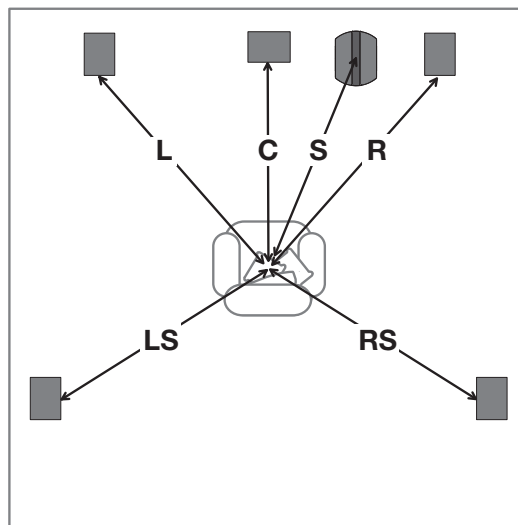

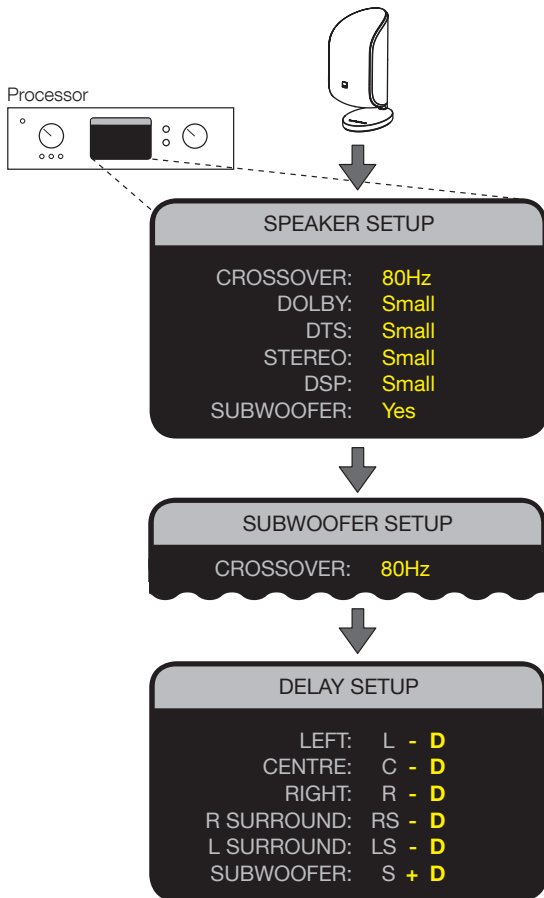


| Speaker | D (m) | D (in) |
|-------------|-------|--------|
| PV1D | 0.3 | 12 |
| M-1 (2011) | 0.6 | 24 |
| M-1 (2005) | 0.8 | 32 |
| 686 | 0.3 | 12 |
| 685 | 0.5 | 20 |
| CM1 | 0.3 | 12 |
| CM5 | 0.2 | 8 |
| PM1 | 0.6 | 24 |
| 805 Diamond | 0.7 | 28 |

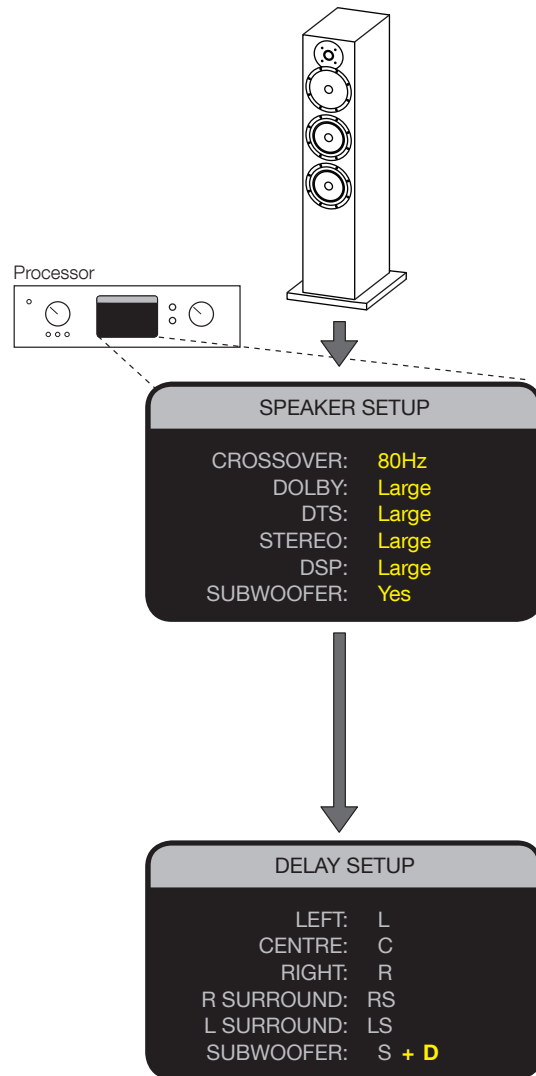


| Speaker | D (m) | D (in) |
|---------|-------|--------|
| PV1D | 0.3 | 12 |

2 2a

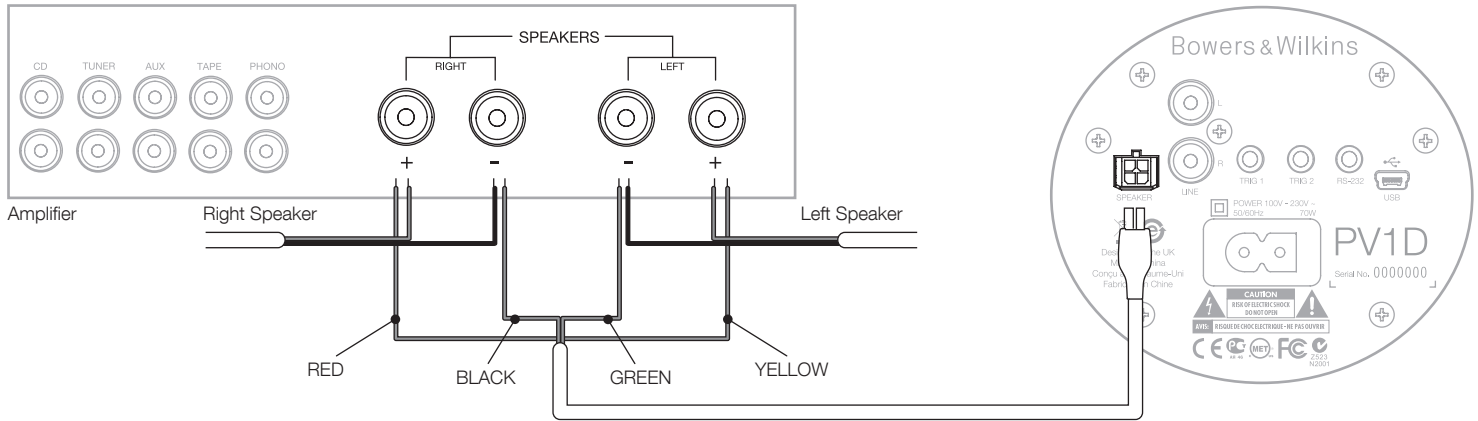

2b

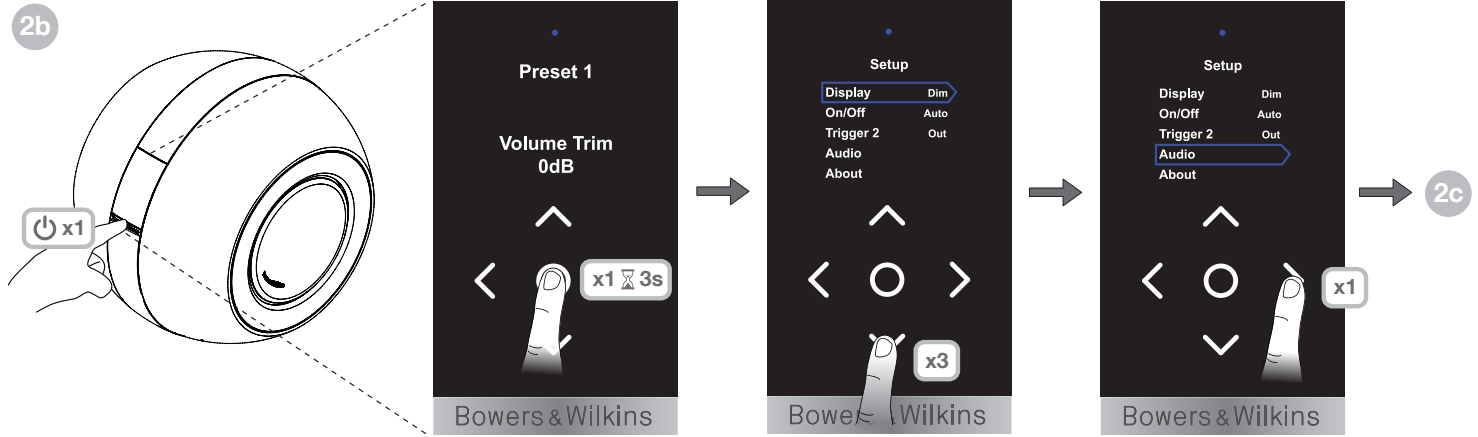


2c

- [?]
- [M-1 (2011)] → 2d
- [M-1 (2005)]
- [686]
- [685]
- [CM1] → 2e
- [**CM5**]
- [PM1]
- [805 Diamond]













[www](http://www.bowers-wilkins.com)

| | |
|-------------------------------|--|
| Description | 2-way vented-box system |
| Drive Units | 1x ø25 mm (1in) aluminium dome high-frequency 1x ø165mm (6.5in) woven Kevlar cone bass/midrange |
| Frequency range (-6dB) | 45Hz and 50kHz |
| Power handling | 120W |
| Sensitivity | 88dB spl (2.83V, 1m) |
| Impedance | 8 (minimum 3.7) |

2d

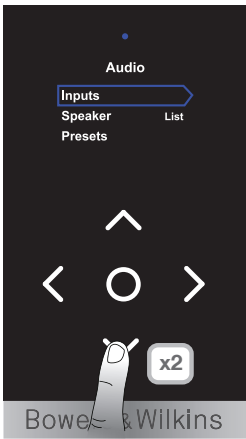


2e

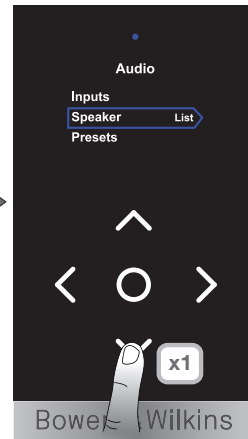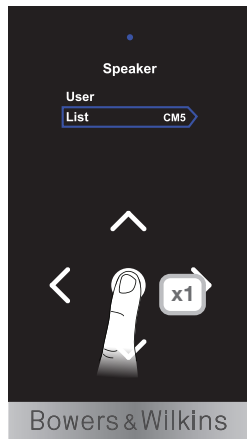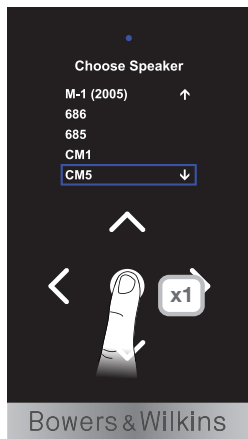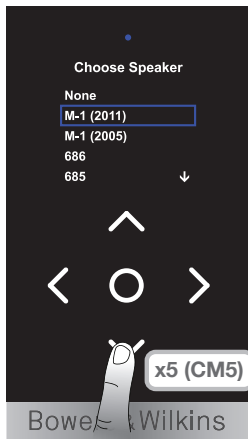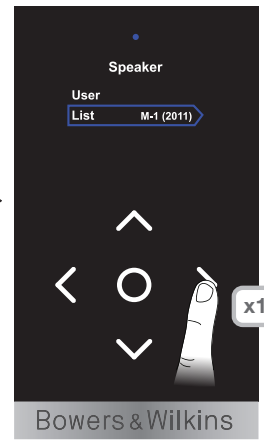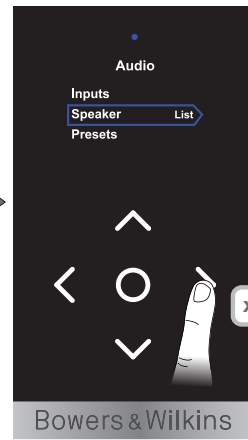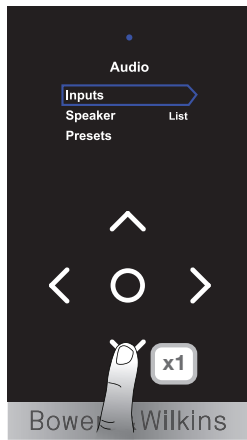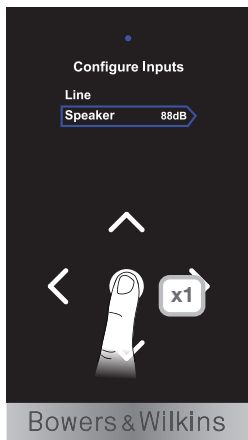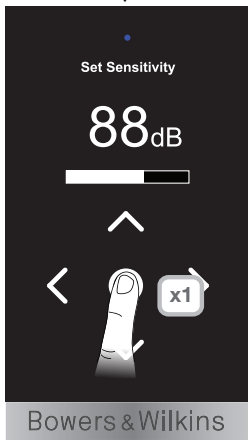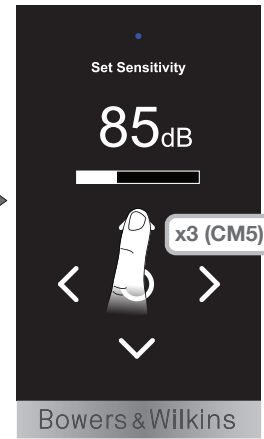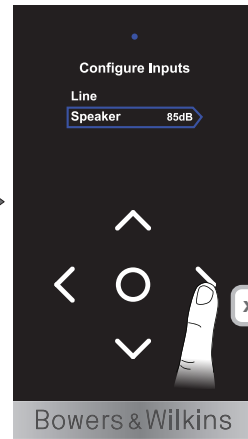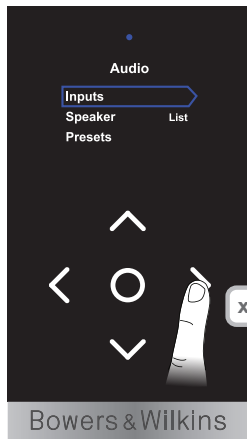


2f

2f

2d →
2e →

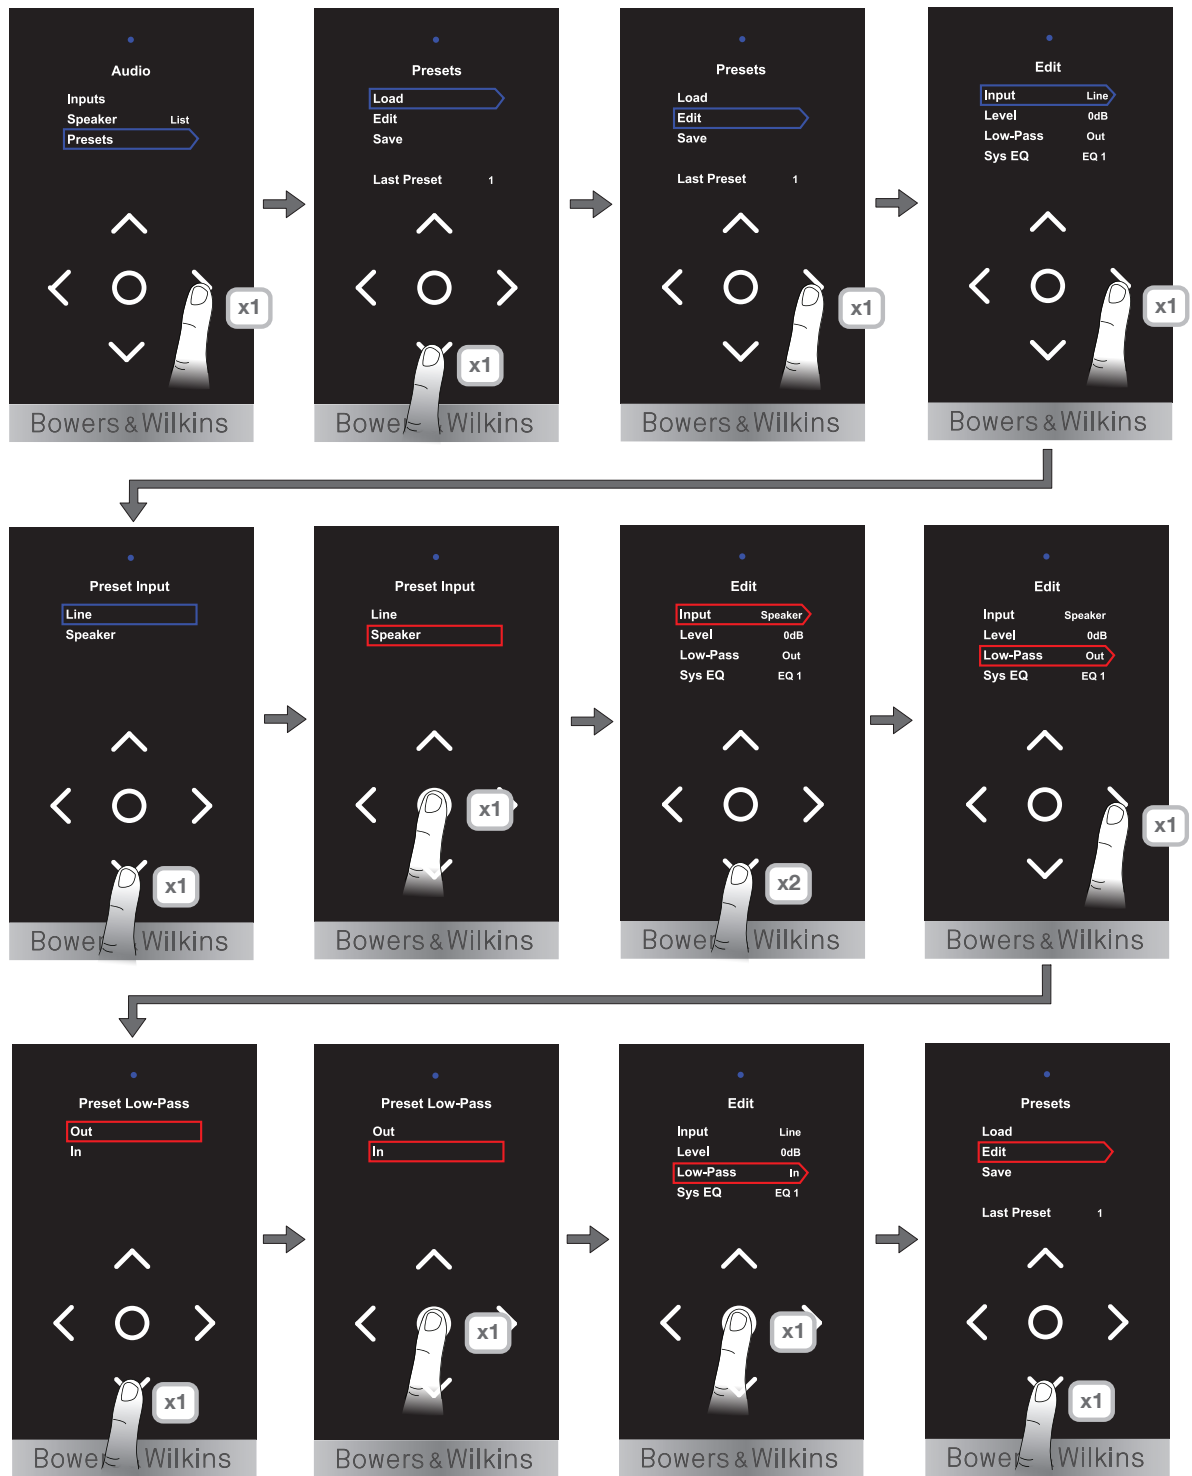

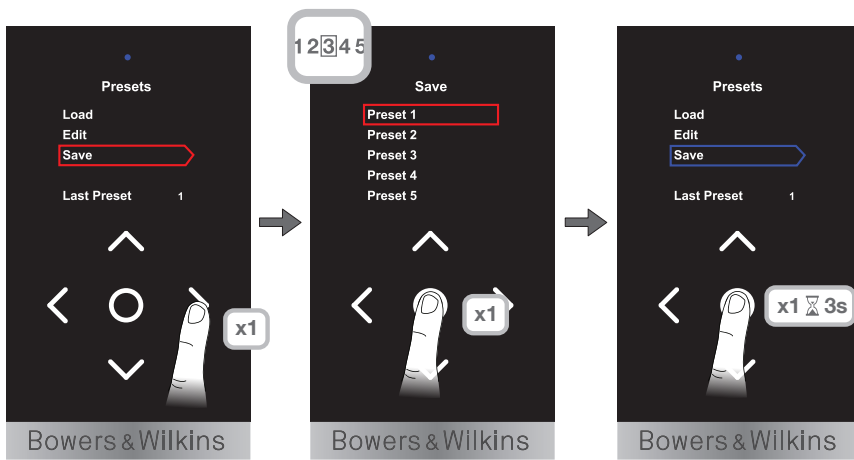

www.bowers-wilkins.com

Bowers & Wilkins

B&W Group Ltd
Dale Road
Worthing West Sussex
BN11 2BH England

T +44 (0) 1903 221 800
F +44 (0) 1903 221 801
info@bwgroup.com
www.bowers-wilkins.com

B&W Group (UK Sales)
T +44 (0) 1903 221 500
E uksales@bwgroup.com

B&W Group North America
T +1 978 664 2870
E marketing@bwgroupusa.com

B&W Group Asia Ltd
T +852 3472 9300
E info@bwgroup.hk

Copyright © B&W Group Ltd. E&OE
Printed in China.